


# Industrial Monitor



<b>Panel</b>	<b>Cell Type</b> <b>Aspect Ratio / Size</b> <b>Glass Surface</b> <b>Pixel numbers / Colors</b> <b>Pixel Pitch</b> <b>Active Area</b> <b>Light Source</b> <b>Brignthess / Contrast</b> <b>Viewing Angle</b>	Color active matrix TFT (Thin-Film-Transistor) LCD panel 4 : 3 / 6.4" viewable diagonal area Black Anti-Glare, low reflection coating 640(H) x 480(V) / 262K 0.204(H) x 0.204(V) mm 130.56(H) x 97.92(V) mm Long life, 50,000 hrs (typ) 350 cd/m2 (typ) , 500 : 1 Horizontal 150o (typ) (- 75o ~ + 75o) Vertical 140o (typ) (-70o ~ + 70o)
<b>Input Sources</b>	<b>Response Time</b> <b>Video System</b> <b>PC System</b>	0.25 ms NTSC / PAL / SECAM supported(Auto detecting) <b>Signal</b> Analog RGB (0.7/1.0 Vp-p, 75 ohms) <b>Sync</b> Composite Sync, Separate Sync, Sync On Green <b>Frequency</b> Fh : 30 - 82Khz , : 50 -75Hz Fv <b>Resolution</b> 640 x 480@60 / 70 / 75 Hz 720 x 400@60 / 70 Hz <b>Recommended</b> 640 x 480@60 Hz
<b>Input Terminals</b>	<b>Audio System</b> <b>Composite Video</b> <b>S-Video</b>	Stereo 2W x 2 Amplifier BNC connector x 1 4 Pin Dim S-Connector x 1
<b>Output Terminal</b>	<b>Component Audio</b> <b>PC Signal</b> <b>PC Audio</b> <b>Power Plug</b> <b>Ear phone</b>	RCA connector x 2 (Audio_R & Audio_L) 15 Pin Female D-Sub x 1 Stereo Headphone Jack x 1 12VDC Jack Stereo Headphone Jack x 1
<b>Control</b>	<b>Front Panel (5 Keys)</b>	Men/Select , Auto , Up , Down , Power
<b>Convenient Features</b>	<b>Auto Calibration</b> <b>Back Light Adjustment</b> <b>OSD Menu</b> <b>Wall Mount Ready</b>	Multi-Languages VESA 75 x 75(mm)
<b>Power</b>	<b>Input Voltage</b> <b>power Rating</b> <b>(Support DPMS)</b>	Universal / Auto-Sensing, 90 to 260VAC, 50 / 60 Hz 15 watt < 5 watt < 5 watt
<b>Operating Condition</b>	<b>Temperature</b>	0OC ~ 40OC (32OF ~ 104OF)
<b>Storage Condition</b>	<b>Humidity</b> <b>Temperature</b> <b>Humidity</b>	10% ~ 90% (no condensation) - 20OC ~ 60OC (- 4OF ~ 140OF) 10% ~ 90% (no condensation)
<b>Dimensions</b>	<b>Physical</b>	With Flange(W x H x D) : TBD Without Flange(W x H x D) : TBD
<b>Weight</b>	<b>Carton</b> <b>N.W. / G.W.</b> <b>SV + AV</b>	W x H x D = TBD 2.5 Kgs / 3.0 Kgs
<b>Optional</b>	<b>Touch Screen</b> <b>PC Mainboard</b> <b>Speaker</b> <b>Protect Glass</b>	Screen Protected , Double coating FCC , CE
<b>Certification</b>		
<b>Container Loaded</b>	<b>20ft / 40ft / 40ft HQ</b>	TBD (Sets , By pallet)

# Industrial Monitor

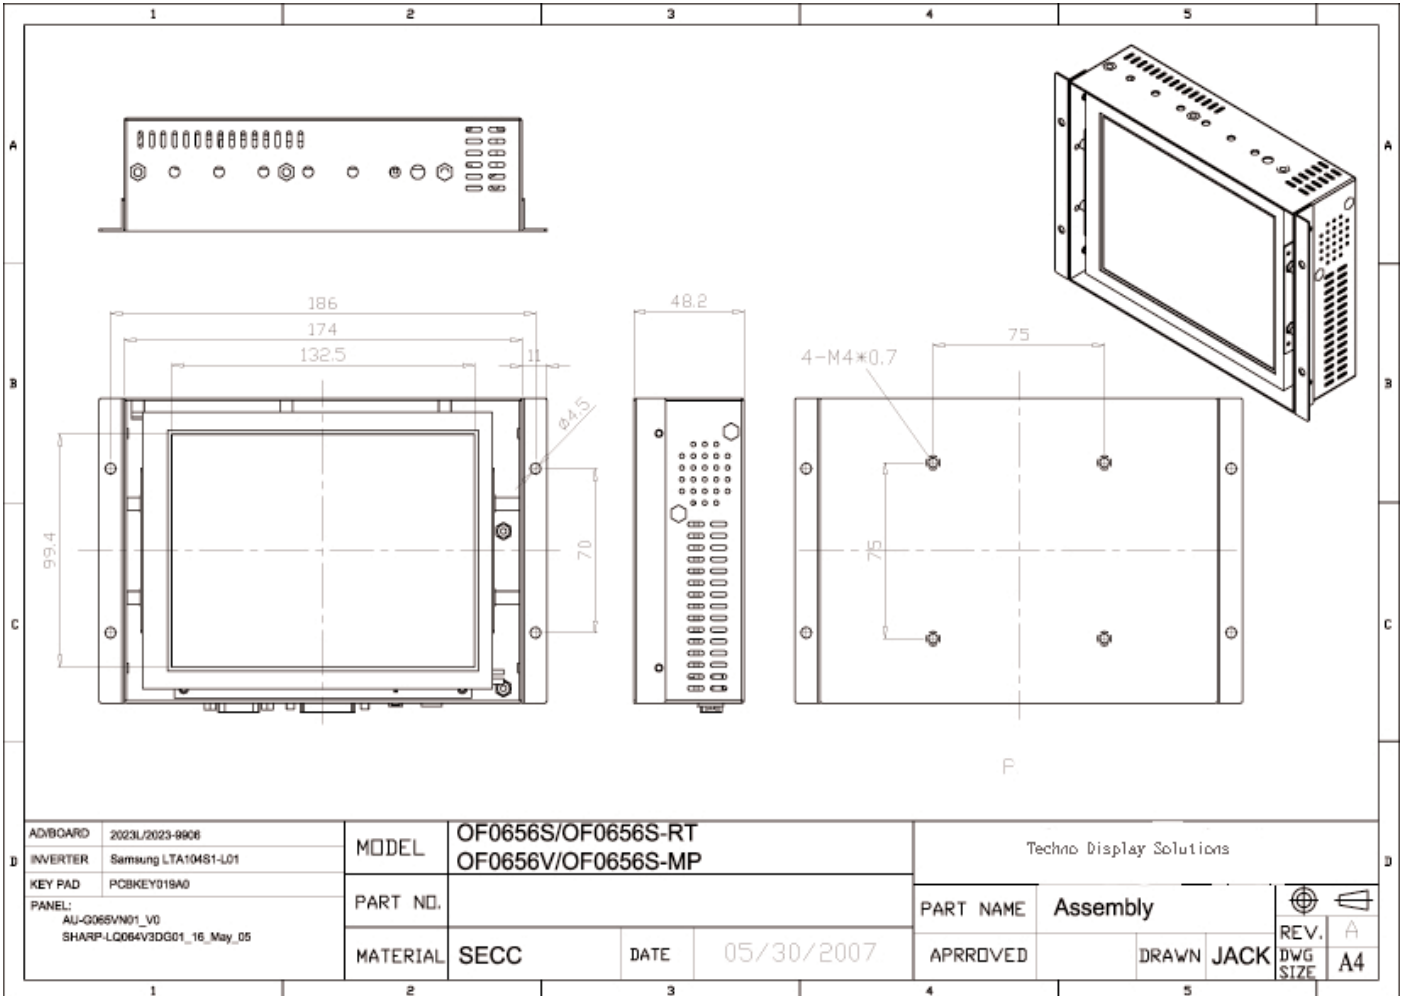

Zona Ind. Nord Torre Sapienza, 06055 Marsciano (PG)

Tel.+39 075 885 1026 - 885 2484 - Fax +39 075 885 1170

info@monitor-industriali.com